




> LM Trac 486

The modern, ergonomically optimised cab of LM Trac 486 makes the operator's work light and efficient. The hydraulic system features load sensing and the hydrostatic four-wheel drive together with optimal tire set up guarantees good and secure grip also on slippery surfaces.

Carefully designed weight distribution makes the machine agile and increases safety on inclined surfaces.

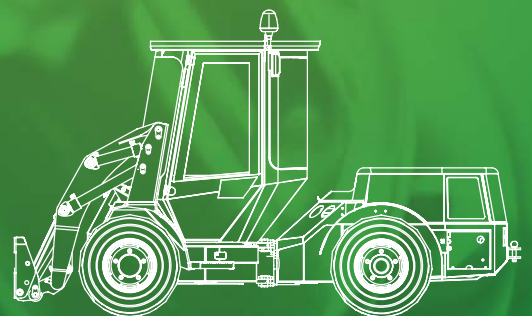

Technical data

486

ENGINE AND TRANSMISSION

Engine	VM Motori D754 SE3, 4-syl. turbodiesel, EU Stage 3A
Cylinder capacity	2970 cm ³
Power	51 kW / 2600 rpm (70bhp)
Torque	250 Nm / 1800 rpm
Transmission	Hydrostatic four-wheel drive, 2 speed ranges
Output	0-135 ltr/min (drive pump)
Pressure	max. 350 bar (drive pump)
Speed ranges	0-15 km/h & 0-30 km/h
Forward/reverse selection	Electrical switch, press button
Steering	Hydrostatic articulated steering, steering angle 43 degrees
Brakes	Wet disc brakes front, parking brake front
Tires	31 - 11.5 R15
Fuel tank	58 ltr



WORK HYDRAULICS

Type	Load-sensing system, max. pump output 110 ltr/min
Engine hydraulics	0-100 ltr/min, stepless control
Pressure MAX	200 bar
Control	Joystick with rollers
Implement connection	LM / Kunta 500 / Vila / Volvo
Hydraulic oil tank	100 ltr
Electrical system	12 V

OPTIONAL EQUIPMENT

Hydraulic oil heater, Rear lift, Air-conditioning, Central lubrication system, LED work lights, Parking heater, etc.

DIMENSIONS AND WEIGHT

Length	3800 mm, front loader model (mast version 3400 mm)
Height	2100 mm
Width	1650 mm
Turning radius, inner	1540 mm
Ground clearance	210 mm
Dead weight	2660 kg

We reserve the right to modifications without prior notice.

MANUFACTURER:



OY LAI-MU AB
NIITTAAJANTIE 9
FI-26820 RAUMA

TEL: +358 2 8387 2400
FAX: +358 2 8387 2444

www.laimu.fi
laimu@laimu.fi

DISTRIBUTOR:

LM Tools for all needs.